

**KEY BENEFITS**

- Fire safe API 607 design
- ISO 5211 mounting pad
- NACE MR-0175 compliant


## SEAL-WELD CLASS 1500 FULL PORT THREADED BALL VALVE




**OVERVIEW**

The Apache SFT3M Series is a seal-weld Class 1500 threaded ball valve for industrial and commercial applications. This series features SS316 body construction, floating ball design, fire safe API 607 compliance, ISO 5211 mounting pad, blow-out proof stem, locking handle, and NACE MR-0175 compliance.

**DIMENSIONAL DATA**

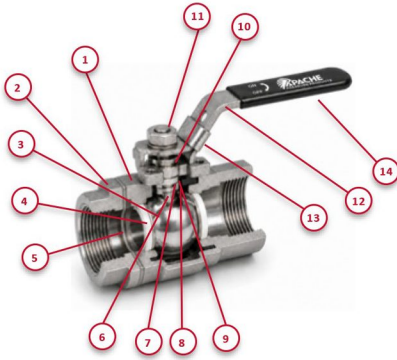


SKU	NPT	A	B	C	D
SFT3M0250F	1/4"	0.25	3.00	2.22	5.00
SFT3M0500F	1/2"	0.50	4.00	2.22	5.00
SFT3M0750F	3/4"	0.75	4.30	2.89	5.83
SFT3M1000F	1"	1.00	4.80	3.50	8.19
SFT3M1500F	1-1/2"	1.50	5.30	4.34	10.16
SFT3M2000R	2"	1.50	6.30	4.34	10.16



**NOTE:**  
Dimensions in inches. \* 2" available in standard port only.

**PRESSURE / TEMPERATURE RATING**

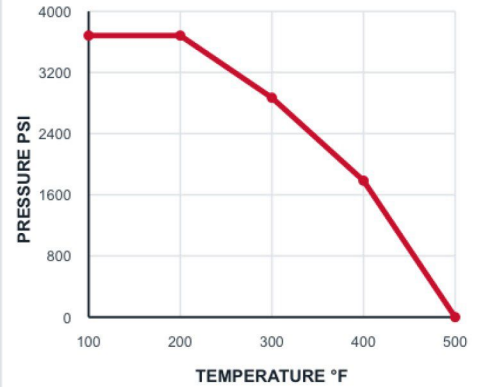

**MATERIALS / CONSTRUCTION**

#	COMPONENT	MATERIAL / SPECIFICATION
1	Body	CF8M
2	Cap	CF8M
3	Ball	CF8M
4	Seat	DELTRIN
5	Joint Gasket	GRAPHITE
6	Stem	SS316 OR 17-4 (1-1/2", 2")
7	Thrust Washer	DELTRIN
8	Stem Packing	GRAPHITE
9	Gland Nut	AISI 304
10	Spring Washer	AISI 304
11	Stem Nut	AISI 304
12	Handle	AISI 304
13	Locking Device	AISI 304
14	Handle Sleeve	PVC

**STANDARDS & OPTIONS**

<b>Pressure Rating</b>	ASME B16.34 Class 1500, 3600 WOG
<b>Body</b>	SS316 body, floating ball
<b>Port</b>	Full port; 2" available in standard port only
<b>Valve Style</b>	Seal-weld threaded ball valve
<b>Fire Safe</b>	API 607
<b>Stem</b>	Blow-out proof stem
<b>Mounting</b>	ISO 5211 mounting pad
<b>Handle</b>	Locking handle
<b>Threads</b>	ANSI B1.20.1, BS21, DIN 259/2999
<b>Compliance</b>	NACE MR-0175 compliant

**QUALITY. INTEGRITY. RELIABILITY.**

Engineered solutions for demanding environments.

[www.apachemfg.com](http://www.apachemfg.com)

**GREATER HOUSTON**

8809 Bailey Rd  
Manvel, TX 77578  
(713) 941-1669

**ODESSA**

2650 West Remington Rd  
Odessa, TX 79763  
(432) 385-7470