APACHE PRESSURE PRODUCTS

SFT3M SERIES

THREADED BALL VALVE

KEY BENEFITS

- Fire safe API 607 design
- ISO 5211 mounting pad
- NACE MR-0175 compliant




SEAL-WELD CLASS 1500 FULL PORT THREADED BALL VALVE


OVERVIEW

The Apache SFT3M Series is a seal-weld Class 1500 threaded ball valve for industrial and commercial applications. This series features SS316 body construction, floating ball design, fire safe API 607 compliance, ISO 5211 mounting pad, blow-out proof stem, locking handle, and NACE MR-0175 compliance.

DIMENSIONAL DATA

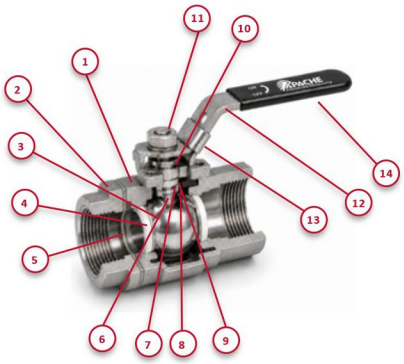


SKU	NPT	A	B	C	D
SFT3M0250F	1/4"	0.25	3.00	2.22	5.00
SFT3M0500F	1/2"	0.50	4.00	2.22	5.00
SFT3M0750F	3/4"	0.75	4.30	2.89	5.83
SFT3M1000F	1"	1.00	4.80	3.50	8.19
SFT3M1500F	1-1/2"	1.50	5.30	4.34	10.16
SFT3M2000R	2"	1.50	6.30	4.34	10.16



NOTE:
Dimensions in inches. * 2" available in standard port only.

PRESSURE / TEMPERATURE RATING

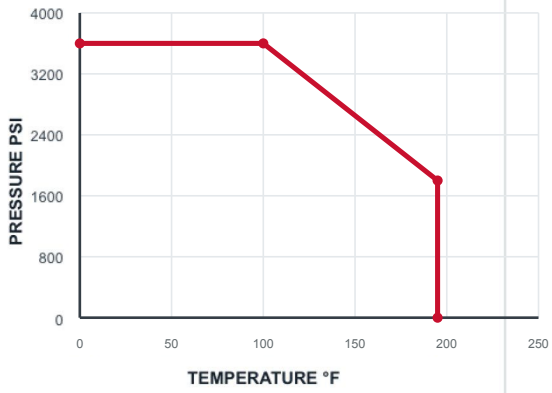

MATERIALS / CONSTRUCTION

#	COMPONENT	MATERIAL / SPECIFICATION
1	Body	CF8M
2	Cap	CF8M
3	Ball	CF8M
4	Seat	DELRIN
5	Joint Gasket	GRAPHITE
6	Stem	SS316 OR 17-4 (1-1/2", 2")
7	Thrust Washer	DELRIN
8	Stem Packing	GRAPHITE
9	Gland Nut	AISI 304
10	Spring Washer	AISI 304
11	Stem Nut	AISI 304
12	Handle	AISI 304
13	Locking Device	AISI 304
14	Handle Sleeve	PVC

STANDARDS & OPTIONS

Pressure Rating	ASME B16.34 Class 1500, 3600 WOG
Body	SS316 body, floating ball
Port	Full port; 2" available in standard port only
Valve Style	Seal-weld threaded ball valve
Fire Safe	API 607
Stem	Blow-out proof stem
Mounting	ISO 5211 mounting pad
Handle	Locking handle
Threads	ANSI B1.20.1, BS21, DIN 259/2999
Compliance	NACE MR-0175 compliant

QUALITY. INTEGRITY. RELIABILITY.

Engineered solutions for demanding environments.

www.apachemfg.com

GREATER HOUSTON
8809 Bailey Rd
Manvel, TX 77578
(713) 941-1669

ODESSA
2650 West Remington Rd
Odessa, TX 79763
(432) 385-7470

Design may be subject to change without notice. Please consult with our sales experts for specific requirements.